

Technical specifications


	CHASSIS	FIXED DECK
Engine	4-stroke, in-line 4-cylinder, 1,299 cc, dual overhead cam, electronic fuel injection, Euro 6	
Max Power	61 kW @ 6,000 rpm	
Max torque	112 Nm @ 4,300 rpm	
Max Speed	130 km/h	
Gearbox	manual, n° 5 gears + reverse	
Brakes	front: disc Ø 210 mm / rear: drum Ø 203 mm	
Traction	rear	
Tyres	155/80 R13	
Dimensions	length 3,555 mm, width 1,395 mm, height 1,705 mm	length 3,420 mm, width 1,395 mm, height 1,705 mm
Wheelbase	1,830 mm	
Overhang	front 880 mm / rear 845 mm	front 880 mm / rear 710 mm
Turning radius	4,000 mm	
Payload dimensions	-	1,980 mm x 1,330 mm x 290 mm
G.V.W.	1,500 kg	
Gross Vehicle Weight	830 Kg (895 Kg*)	895 kg
Payload	-	605 kg
Fuel Tank capacity	35 l (5 l reserve)	

*minimum allowed weight (vehicle + body)

Unique color



White Silk

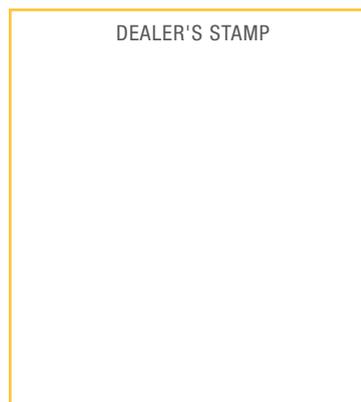

piaggiocommercialvehicles.com

PorterEL 05/2019

The Piaggio Commercial Vehicles Service is always by your side when you need it: accompanying you during your working day to give you the best service possible, always.

CUSTOMER CARE

Piaggio Commercial Vehicles Customer Care: a dedicated service created to listen to your needs and opinions

ROADSIDE RECOVERY SERVICE

Piaggio Commercial Vehicles Roadside Recovery: a dedicated service on call 24 hours a day

The manufacturer reserves the right to modify the technical characteristics and appearance of its products at any time without prior notification. Original Piaggio spare parts offer the certainty of guaranteed quality and will keep your vehicle in peak working condition.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001 =

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV
= ISO 14001 =

COMPANY WITH
SAFETY SYSTEM
CERTIFIED BY DNV
= OHSAS 18001 =

2 YEAR'S
guarantee

2 YEAR'S
roadside assistance

as indicated in brochures

The Brand  is the property of Piaggio & C spa



PORTER EL

PORTER EL

Affordably simple

EL is the threshold to the Porter range which saves by adopting **simplified** technical solutions, like the breaking and steering traditional systems, making **no compromise on performance**, always on top level in its category.



Fixed Deck

With a total length of just 3.5 m and extraordinary manoeuvrability, it can reach even the most cramped, inaccessible locations, but can still carry objects up to approximately 2 m in length and up to 605 kg of payload. The 29 cm high alloy dropsides and tailboard, which fold down on three sides of the deck, a load threshold just 72 cm from the ground and the flat, even surface of the deck itself make loading and unloading significantly easier, even when using mechanical loading equipment.

Chassis

Combining extraordinary compactness and agility with sturdy construction and impressive load capacity, it can be configured with a variety of upfits as well as offering advantages in terms of quicker transport times and simplicity of use, combined to its ability to reach particularly inaccessible destinations, such as city alleys or the narrow streets of small historic town centres.



EL, the advantages of choosing PORTER

Equipped with a modern and performing Euro 6 petrol engine Porter EL represents the **ideal solution** for internal circulation purposes, for farms, construction companies, artisans and, generally speaking, for any professional who prevalently works in urban contexts and needs a compact vehicle able to match efficiency and economy.



Petrol MultiTech

Designed to comply with stringent **Euro 6** emissions standards, the petrol MultiTech is a **state of the art** unit meeting tomorrow's requisites for the environment and fuel economy. This **1,299 cc, four cylinder, 16 valve, double overhead camshaft engine** with chain driven camshafts offers significant performances: **power** reaches **61 kW** and **torque** value is **112 Nm** while both fuel consumption and CO₂ emissions are reduced.

Strong points

- Incredible **manoeuvrability** thanks to compact dimensions (3.5 x 1.4 m) coupled with a 4 m turning radius
- Impressive **load capacity** (up to 605 kg)
- High **exploitability** thanks the flat, wide (2 europallet size) and practical deck (dropsides fold down on three sides and a load threshold at 72 cm distance from the ground)
- Considerable **cost effectiveness** due to reduced consumption (up to 5.5 l/100 km in extra-urban use) and low fixed costs

